

EXCELLENCE IN
AUTOMATED ENTRANCES



fire rated



UL 325



low energy



push pull



24 VDC



ADA



Ditec HA8-SP

Standard Profile - Low Energy Operator

INSTALLED IN:

Hospitals - Retail Stores - Schools & Universities - Airports
Convention Centers - Casinos - Industrial Buildings - Offices

www.ditecentrematic.com

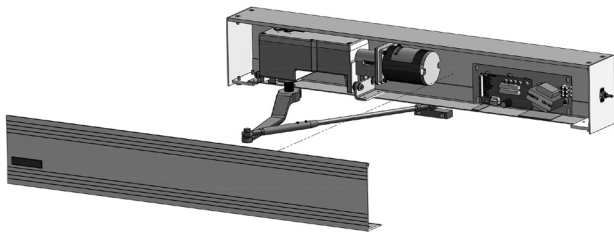

HA8-SP Profile

QUALITY HEAVY DUTY COMMERCIAL CONSTRUCTION

High precision gears made for sustained long-term use
Electro Mechanical Design – for simple dependable operation
Permanent lubrication – maintenance free
Cast Alloy Gear Box
1/8th HP motor
Digital Control Board

ADVANCED TECHNOLOGY

On-board programming
Built in strike/mag lock relay – fail safe or fail secure
Separate inputs for activation and safety devices
Plug-n-Play design for fast trouble free installation
Compatible with all safety and activation devices
Integrates with building access & security systems
Adjustable spring tension overcomes high wind and stack pressures
One-way clutch – allows for easy manual door operation

POWERFUL AND QUIET, YET FORGIVING

XP Spring available for extra closing force
Concealed Adjustable Door Stop – eliminates external door stops
Ultra Quiet operation – noise free in both automatic and manual modes

DURABLE

Built to outlast the competition
Perfect for high traffic locations

VERSATILE INSTALLATION COMBINATIONS

Concealed (Hinge Hung, Offset Pivoted or Center Pivoted)
Surface Mounted Push or Pull
Dual or Double Egress
Side or Bottom Loading

STANDARD PROFILE OPERATOR

Drive Train Gear Box	Cast Aluminum-Closed Gearbox
Single and Dual Control Box with Digital and Analogue	Single HA-8 w/Data, 24 VDC, 3 AMP
Operating Voltage (Standard)	16 VAC / 115VAC
Magnetic Limit Switches	Yes
Gear Grease	High Wear Protection
Motor	1/8th HP
Opening/Closing Force	Adjustable 5 to 30 lbs.
Arm Connection	1" Solid Spline Spindle
Adjustable Stop	Yes
Operator Switch	On-Off-Hold Open
Adjustable Spring Tension	Yes
Mechanical Clutch	Standard
Header Finish (Standard)	Clear, Dark Bronze, Extruded Aluminum
Header Finish (Optional)	Paint, Special Anodized Colors, Clad
Push or Pull Application	Yes
Easy Manual Operation	Yes
XP Spring	Optional
Surface Mounting	Yes
Concealed Mounting	Center Pivot, Hinge, or Offset Pivots
Bottom Loading	Optional
Push Reveal	0" to 14"
Pull Reveal	0" to 4"
Special Push & Pull Reveals	Call Manufacturer
Push And Go	Optional
Electric Strike Output Power	24 VDC
Fire Door Compatibility	UL10C Approved
Circuit Protection	3 amp Fuse
Total Weight w/ 39" Header	45 lbs.
Meets ANSI 156.19	Yes

Technical data subject to change without notice.

Ditec HA8-SP Rev 02/17

Distributed By:



AAADM American Association of Automatic Door Manufacturers



Entrematic, Amarr, Kelley, Serco, Normstahl, Dynaco, Ditec and EM, as words and logotypes, are examples of trademarks owned by Entrematic Group AB or companies within the Entrematic Group